




uniflex Party and Exhibition Hall

Type: 11.3/400 · Model: 436

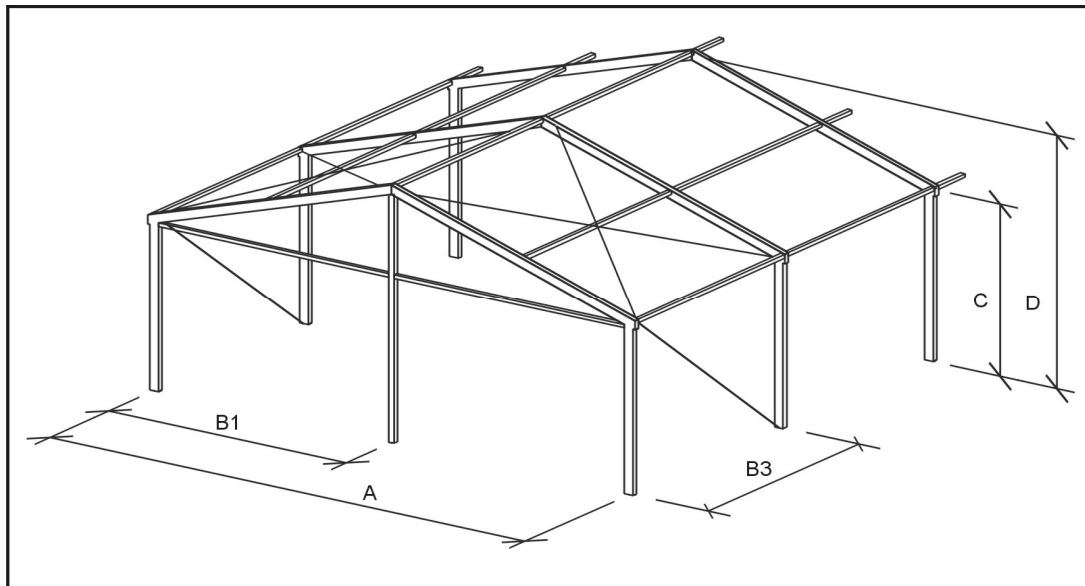

System Measures

Width	(A)	11.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.64 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.89 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 16.3/400 · Model: 246

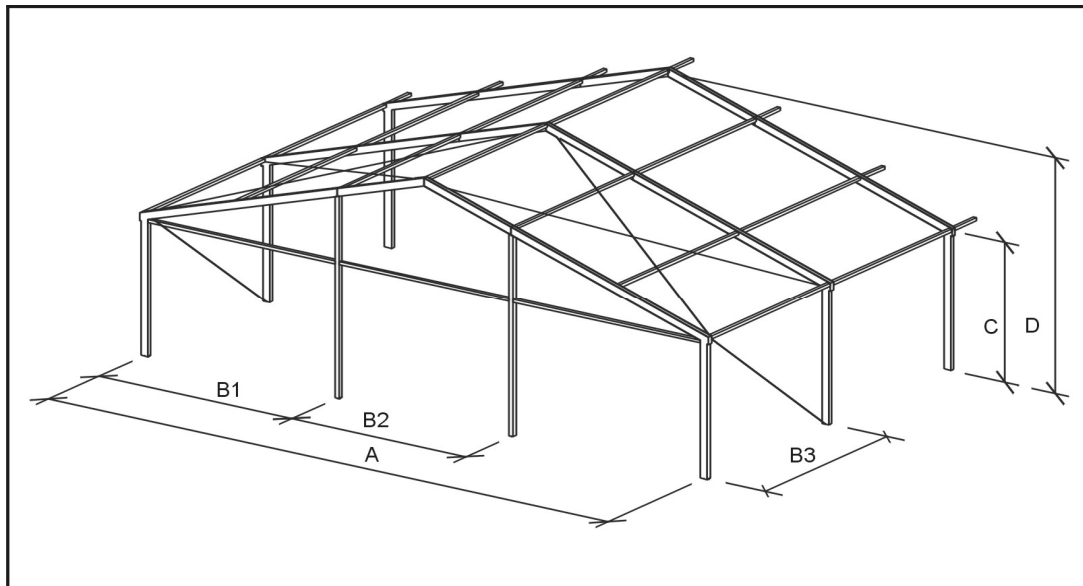

System Measures

Width	(A)	16.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	6.45 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.61 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data


Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!



uniflex Party and Exhibition Hall

Type: 20.3/400 · Model: 249

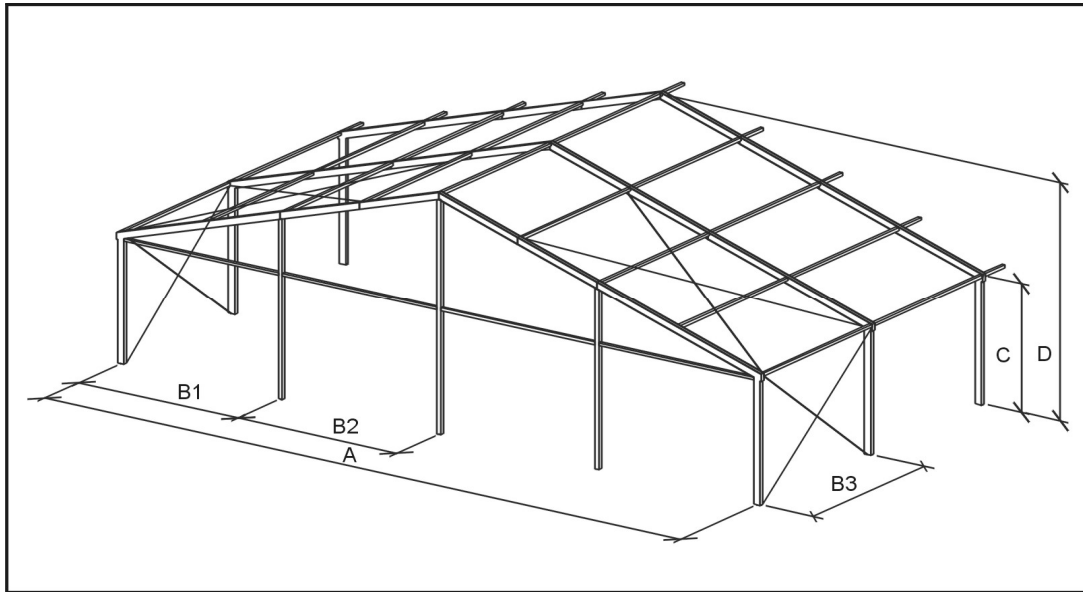

System Measures

Width	(A)	20.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.10 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

uniflex Party and Exhibition Hall

Type: 25.3/400 · Model: 702

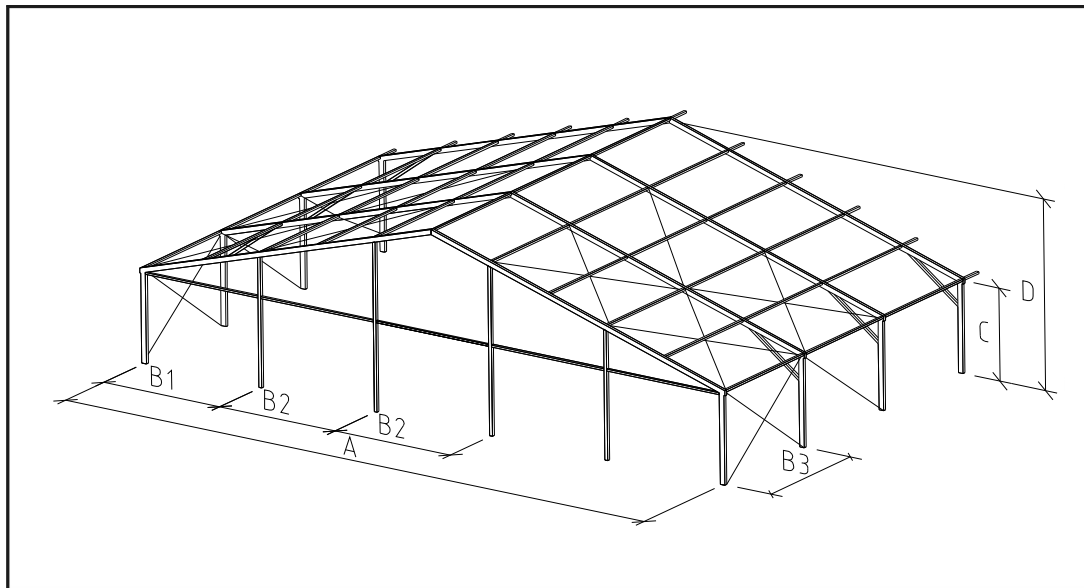

System Measures

Width	(A)	25.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.92 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!